

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 7,236,057 B2
APPLICATION NO. : 10/647929
DATED : June 26, 2007
INVENTOR(S) : Masao Kaizuka

Page 1 of 4

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:


Delete the title page and substitute therefore the attached title page.

Delete Drawing Sheets 1 of 3 and 2 of 3 and substitute therefore the attached Drawing Sheets 1 of 3 and 2 of 3.

Column 13, line 24, replace "signal and A is" with --signal and Δ is--.

Signed and Sealed this

Thirteenth Day of November, 2007

A handwritten signature in black ink, appearing to read "Jon W. Dudas", is written over a rectangular area that contains a faint, repeating pattern of the words "PATENT OFFICE".

JON W. DUDAS
Director of the United States Patent and Trademark Office

(12) **United States Patent**
Kaizuka

(10) Patent No.: **US 7,236,057 B2**
(45) Date of Patent: ***Jun. 26, 2007**

(34) **SPREAD SPECTRUM CLOCK GENERATOR**

(75) Inventor: Masao Kaizuka, San Jose, CA (US)

(73) Assignee: Toshiba America Electronic Components, Inc., Irvine, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 630 days.

This patent is subject to a terminal disclaimer.

5,488,627 A 1/1996 Hardan et al.
5,631,920 A 5/1997 Hardin
5,675,832 A 10/1997 Ikami et al.
5,867,524 A 2/1999 Booth et al.
5,872,807 A 2/1999 Booth et al.
6,144,242 A 11/2000 Jeong et al.
6,404,834 B1 6/2002 Hardin et al.
6,501,307 B1 12/2002 Yen
6,553,057 B1 4/2003 Sha et al.
6,993,109 B2* 1/2006 Leo et al. 375/376

* cited by examiner

Primary Examiner—Arnold Kinkadee

(74) Attorney, Agent, or Firm—Tucker Ellis & West LLP

(21) Appl. No.: 10/647,929

(22) Filed: Aug. 26, 2003

(65) **Prior Publication Data**

US 2005/0069019 A1 Mar. 31, 2005

(51) Int. Cl.
H03L 7/00 (2006.01)

(52) U.S. Cl. 331/1 A; 331/78; 332/123;
375/130; 375/376; 713/500

(58) Field of Classification Search 375/376,
375/130; 327/156; 332/123; 713/500; 331/1 A,
331/78

See application file for complete search history.

(56) **References Cited**


U.S. PATENT DOCUMENTS

3,833,854 A 9/1974 Schonover
5,118,975 A 6/1992 Hills et al.

(57) **ABSTRACT**

A clock signal generator varies a frequency of a digital clock over a selected range of frequencies. The generator employs a divider for lowering a frequency of a clock signal. A counter increments synchronously with the signal, and causes a selected sequence of outputs to be generated by a pattern generator. The pattern generator output forms an input to a digitally controllable delay line which receives the lower frequency clock signal. The pattern generator causes the digital delay line to vary a frequency of the lowered frequency clock signal between selected boundaries. The varying frequency clock signal is then raised up again such that a final clock has a varying frequency, and will exhibit less EMI spiking during switching of an associated, synchronous digital data device. The solid state nature of the generator allows for simple fabrication, inexpensive manufacture and ready integration into digital circuitry, such as multifunction integrated circuits.

15 Claims, 3 Drawing Sheets

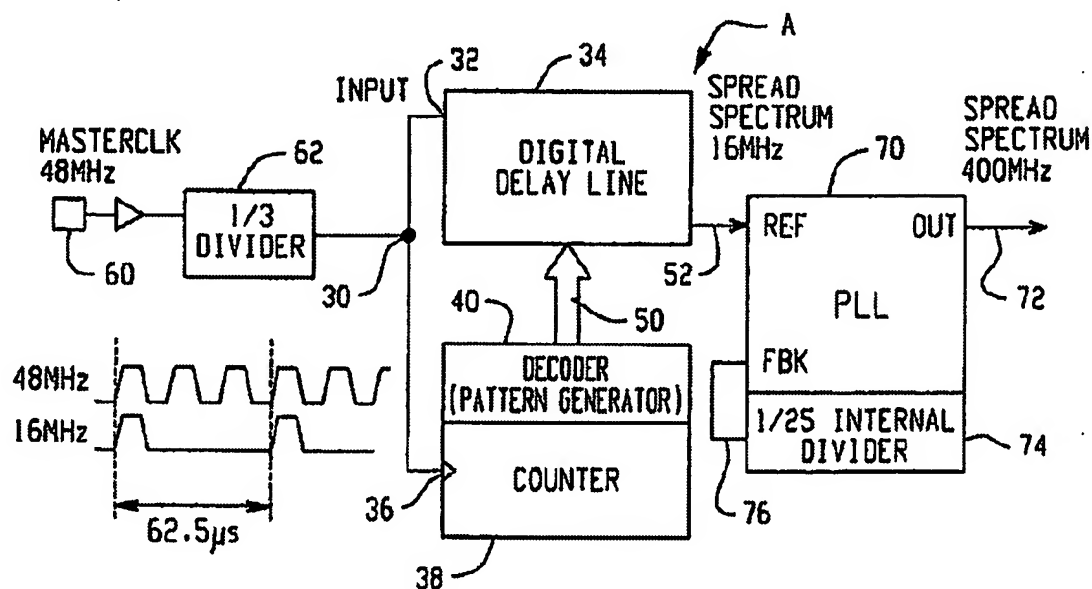

U.S. Patent

Jun. 26, 2007

Sheet 1 of 3

7,236,057 B2

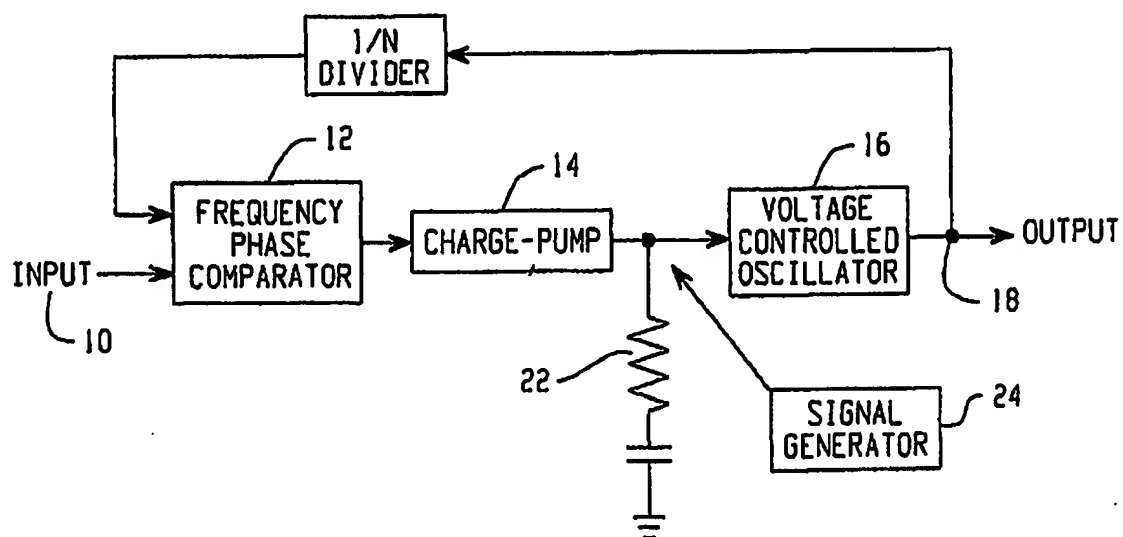


Fig. 1A
PRIOR ART

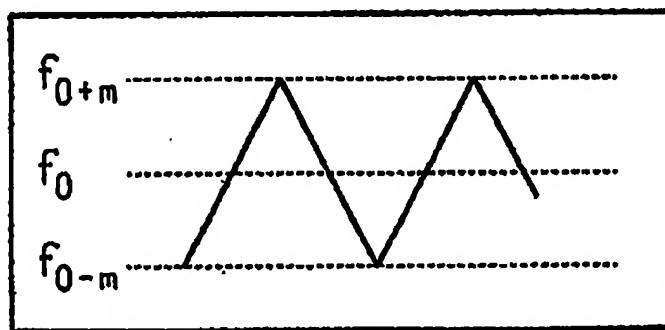


Fig. 1B

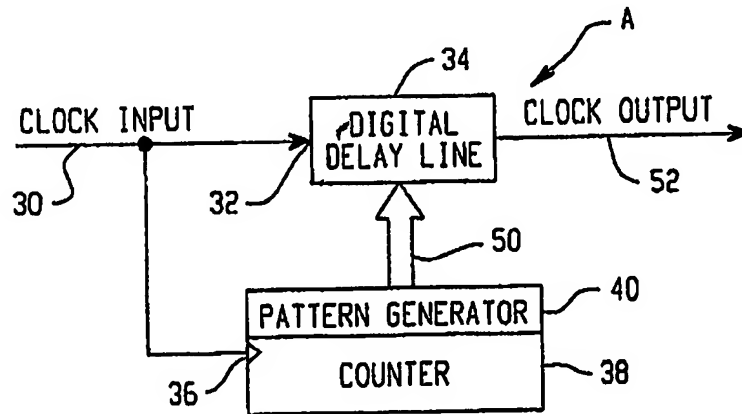


Fig. 2

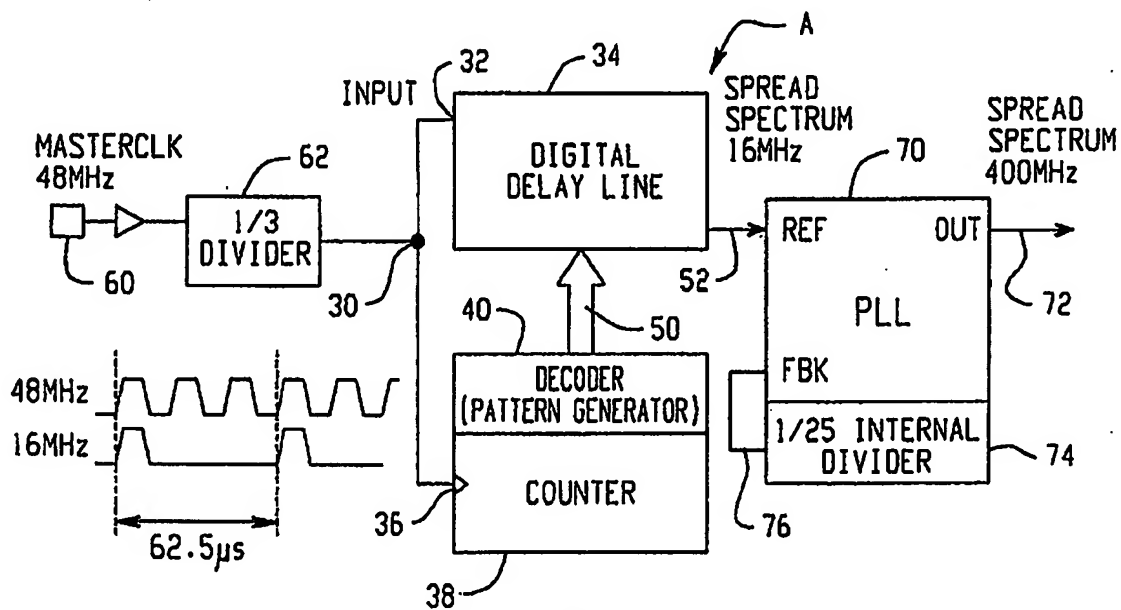


Fig. 3